


Kleinschieber
aus Schmiedestahl
mit NPT-Innengewinde
voller Durchgang

800 lbs. 3/8" - 2"
(PN 125) (DN 10 - 50)

AS644G-BA

angewandte Normen:

API 602, BS5352, NPT
ASME B16.34, PED 97/23 EG

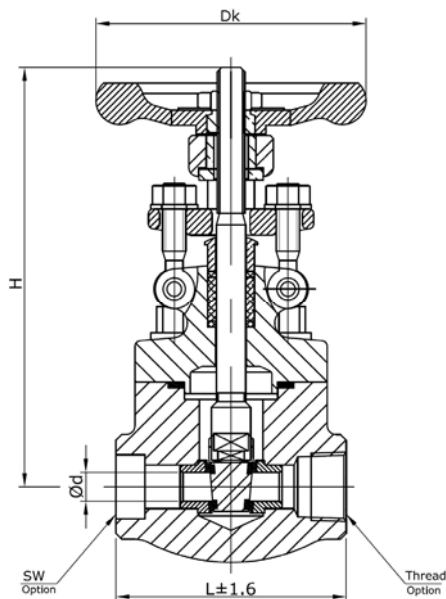

Baumaße (mm)						Gewicht
DN	NPT	L (mm)	H	d	Dk	(kg)
10	3/8"	80	145	10,0	80	2,0
15	1/2"	90	155	14,0	80	2,3
20	3/4"	110	185	18,0	100	3,8
25	1"	127	218	24,0	120	5,5
32	1 1/4"	127	255	30,0	140	7,8
40	1 1/2"	130	277	36,5	140	10,0
50	2"	150	327	48,0	170	15,2

6			Stopfbuchspackung	Graphit	
5			Keil	AISI A276-430	
4			Sitz	AISI A276-420 + Stellite (trim 8)	
3			Spindel	AISI A182-F6	
2			Haube	A 105 (1.0460)	
1			Gehäuse	A 105 (1.0460)	
Pos.	Menge	Einheit	Benennung	Norm – Kurzbezeichnung	Bemerkung
Erstellt / Geprüft			Vorgang	Änd.datum	 +49/391/52 08 93 74 armaturen@miranox.de www.miranox.de
Blatt	Rev.		Benennung	Ausg.datum	
1	0		AS644G(DN)BA0125	2013-03-25	