


Y-Schmutzfänger aus Stahl mit Flanschen Standardsieb

PN 25/40 DN 15 – 700

SF344F-AA

angewandte Normen:

EN 558-1, EN 1092
PED 97/23 EG

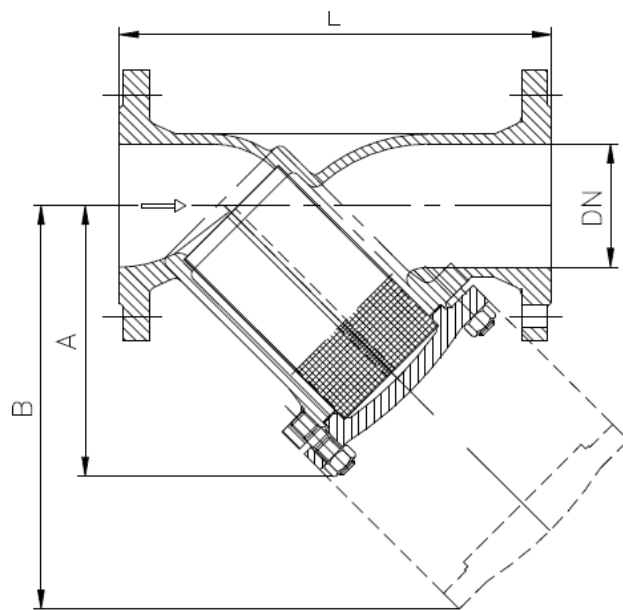

DN	Baumaße (mm)			Maschen- weite	Kv-Wert	Gewicht
	L GR-1	A	B	mm	m ³ /h	kg
15	130	75	115	0,50	4,0	3,0
20	150	75	115	0,50	7,0	3,8
25	160	90	135	0,85	11,0	5,6
32	180	90	135	0,85	17,0	6,9
40	200	110	170	0,85	27,0	8,3
50	230	120	190	0,85	41,0	11,4
65	290	140	220	0,85	67,0	15,5
80	310	165	265	1,20	100,0	22,4
100	350	220	340	1,20	154,0	34,7
125	400	260	410	1,20	239,0	50,3
150	480	300	475	1,20	345,0	79,5
200	600	360	580	1,20	623,0	157,3
250	730	445	785	2,00	975,0	163,8
300	850	545	945	2,00	1407,0	186,4
350	980	590	1060	2,00	1790,0	205,0
400	1100	670	1195	2,00	2341,0	280,0
450	1200	740	1320	2,00	2961,0	345,0
500	1250	800	1425	2,00	3660,0	400,0
600	1450	935	1665	2,00	5274,0	545,0
700	1650	1080	1920	2,00	7184,0	780,0

4*			Deckeldichtung	Graphit	Ersatzteil
3*			Sieb	1.4301	Ersatzteil
2			Deckel	St52-3 (1.0570)	
1			Gehäuse	GP240GH (DN15 – DN200) St37-2 (DN250 – DN700)	
Pos.	Menge	Einheit	Benennung	Norm – Kurzbezeichnung	Bemerkung
Erstellt / Geprüft			Vorgang	Änd.datum	 +49/391/52 08 93 74 armaturen@miranox.de www.miranox.de
Blatt	Rev.		Benennung	Ausg.datum	
1	1		SF344F(DN)AA0025 SF344F(DN)AA0040	2013-07-23	