


RückschlagklappePN 10/16 DN 25 – 300**RK311F-KA**

aus Grauguss mit Flanschen

Klappenscheibe ummantelt

angewandte Normen:

EN 558-1, EN 1092
PED 97/23 EG

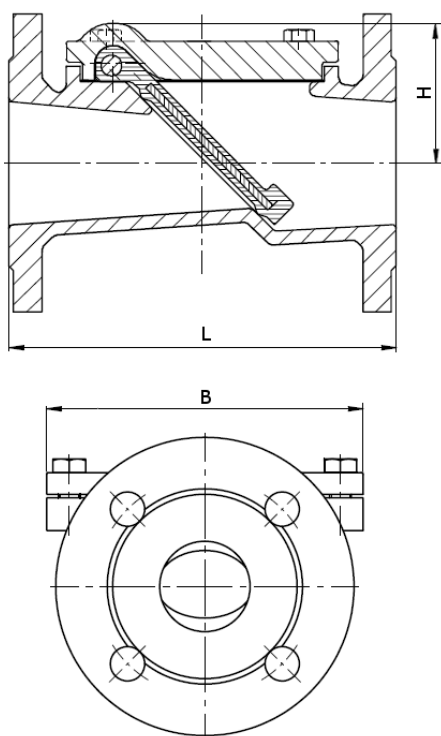

DN	Baumaße (mm)			Gewicht (kg)
	L (GR-48)	B	H	
25	160	84	43	4,0
40	180	164	78	11,2
50	200	164	78	12,4
65	240	164	78	15,1
80	260	232	100	28,0
100	300	232	100	33,4
125	350	290	130	48,0
150	400	290	130	62,8
200	500	390	190	108,0
250	600	390	190	139,0
300	700	550	260	247,0

5			Gehäuseauskleidung	IIR (Butyl)		NRH (Hartgummi)		optional
4			Deckeldichtung	EPDM				
3			Klappenscheibe	0* IIR	E* EPDM	N* NBR	V* CSM	(ummantelt)
2			Deckel	EN-GJL-250 (GG-25)				
1			Gehäuse	EN-GJL-250 (GG-25)				
Pos.	Menge	Einheit	Benennung	Norm – Kurzbezeichnung				Bemerkung
Erstellt / Geprüft			Vorgang		Änd.datum		 Armaturen GmbH ☎ +49/391/52 08 93 74 armaturen@miranox.de www.miranox.de	
Blatt	Rev.		Benennung		Ausg.datum			
1	0		RK311F(DN)KA*010 RK311F(DN)KA*016		2013-11-27			